



SPSKR050

Design by Manuel Vivian

Collection of ceiling, suspended and table lamps in flame-retardant TREVIRA®CS fabric (100% polyester Glow wire 960 °C), available in several sizes and colours. The fabric can also come in a double-layer version with an exterior black net fabric. A decorative inner lampshade (also printable with customized graphic) is available.


Typology: SUSPENDED

Ratings

- E27
- Downlight and uplight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Steel frame, painted
- Cone in pongé fabric and light covering in jersey

kg 3.5 m³ 0.13

∅ 12 cm

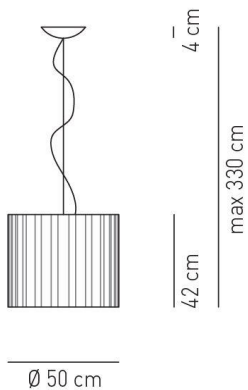

Product code composition

SKIRT / diffusore INCLUSO / diffuser INCLUDED

Type	Article	Exterior Net	Fabric Colours	Source
SP	SKR 050 E27	NE black net	BC white	E27 1x Max 20W LED or 1x Max 70W halogen
		XX no black net	AR orange	
			BL blue	
			GR light grey	
			RS red	
			VE light green	



IP20 +LED

220-240Vac

example composition code SP SKR050E27 XX RS

Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,18	0,29	0,35	0,38	0,35	0,41	0,48	0,35	0,36




Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,21	0,32	0,41	0,44	0,48	0,51	0,59	0,42	0,44


Available colors




BC White




AR Orange




BL Blue



GR Light grey



RS Red



VE Light green



Black net over a white fabric NEBC

SPSKR050E27_ _ _ _

CUSTOMER _____

NOTES _____

NOTICE:

Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.