

ENG

Product description Xpress

Properties

Xpress is a wireless user interface, which creates great flexibility in interior design, as furniture can be replaced and even walls can be moved, without having to think about how the switches are connected or where they are located. Xpress switch can be stored wherever the user needs it and provides direct access to all Casambi light control functions.



Mounting

Xpress is equipped with magnets for easy attachment to the mounting plate. The mounting plate is included.



Technical data

Size

90 x 90 x 12mm

Colour

White and black

Range

Up to 60 metres in an open space

Battery (included)


CR2430 lithium button cell battery

Battery life

2-5 years, depending on usage

VADSBO  powered by **CASAMBI**

— A complete ecosystem for all lighting

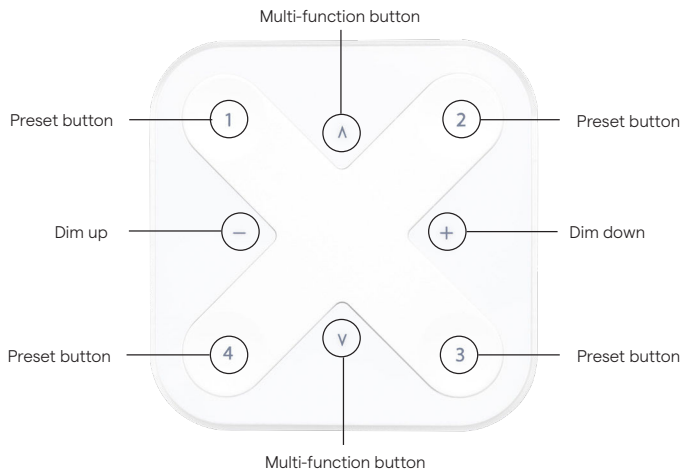

The preset buttons on the Xpress can be configured via the Casambi app. A light indicates the selected preset.

Dim up, dim down

Soft dimming of the last selected preset

Multi-function buttons

- Change the colour temperature with 25 Kelvin
- Change of the Indirect/direct relationship

Preset buttons

- Individual control of light fixtures
- Group control
- Control of all lights
- Create scenarios
- Create animations

Smart functions

Dimming

Hold the "Dim down" or "Dim up" button -

Soft dimming of the last selected preset, cycle takes 5 seconds.

Press the "Dim down" button - selected preset goes to 0%

Press the "Dim up" button - selected preset goes to 100%.

Preset buttons

Press - The selected preset (light control, group control, all lights, scene creator or animation creator) is switched on.

Press again - The selected preset (light control, group control, all lights, scene creator or animation creator) switches off.

Colour temperature

Hold down the multifunctionbutton -

To softly change the colour temperature, cycle takes 5 seconds.

Press the upper multifunction button -

To change to the warmest colour temperature.

Press the lower multifunction button -

To change to the coolest colour temperature.

Indirect/direct relationship*

Hold down the upper multifunction button

- To softly dim up the indirect light, cycle takes 5 seconds.

Hold down the lower multifunction button -

To softly dim up the direct light, cycle takes 5 seconds.

Press the upper multifunction button -

The indirect part reaches its maximum level.

Press the lower multifunction button -

The direct part reaches its maximum level.

*the sum of indirect/direct remains at 100%

Switch off

Press the "Dim down" and "Dim up" buttons simultaneously for more than 1 second -

To turn off all light sources on the selected network.

Pair to network

Pull the plastic strip away from the battery cover and press any button and the device will appear under nearby devices.

Unpairing

Press two optional buttons for more than 5 seconds

The unit temporarily appears among nearby units where you can pair it.

Vadsbo Transformatorer AB

Hilma Anderssons gata 15, 421 31 Västra Frölunda
order@vadsbo.net • www.vadsbo.net

For more information about the Casambi app,
visit our website at www.vadsbo.net/xpress

