


Technical specifications


Material	Track's frame material is extruded aluminium. Insulation profiles inside frame are plastic. Phase and neutral conductors are 2,5 mm ² rectangular copper, earth contact is cutted on aluminium frame. Plastic accessories material is self-extinguishing polycarbonate class Vo. Surface treatment alternatives are powder coating on white RAL9010, grey RAL7040 or black RAL9005 and anodizing. Other RAL colours and treatments are available to order.
Conductors	Three phase conductor (L1, L2, L3), neutral (N) and ground (PE)
Protection class	CLASS I IP20
Other	Can be cut to length on-site. There is no need to bend or tool power conductors after cutting.
Quality and safety	Tested according to EN 60570 and EN 60598.



Profile dimensions

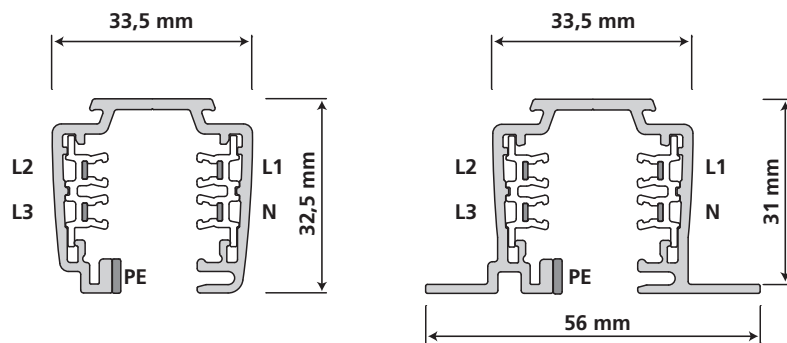

Loading capacity

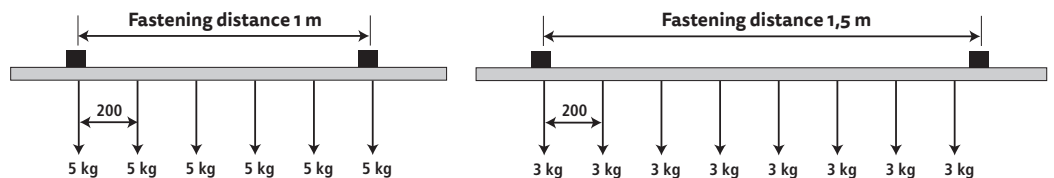

Mounting holes

Pre-drilled holes on the top of track

