RF Single Color Remote Controller

09.283K5.04205









Important: Read All Instructions Prior to Installation

Function introduction

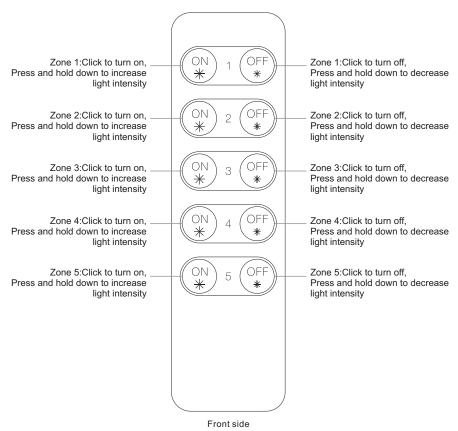

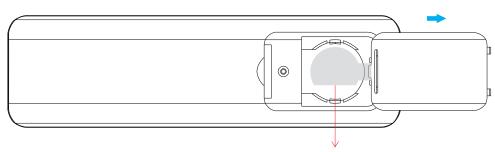

Note:Before the first use, please remove the protective film on the battery.

Back side

Product Data

Output	RF signal
Operation Frequency	868/915/434MHz
Power Supply	3V(1xCR2025 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	136.3x38.9x10.7mm

- · Control 5 zones of receivers separately
- Single color controller
- · Compatible with all universal series RF receivers
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20

Safety & Warnings

- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.


Operation

1. Pair with RF receivers:


Click "Learning Key" > Click \(\frac{\infty}{\sigma} \) of the 5 zones on RF remote \(\frac{\infty}{\sigma} \) LED lights connected with on RF receiver will flicker once \(\frac{\infty}{\sigma} \) The receiver is paired with corresponding zone successfully.

2. How to delete the pairing:

Press and hold down "Learning Key" on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.



Option 2: have each receiver in a different zone, like zone 1, 2, 3 or 4



RF remote